

# NEEVA

# NEEVA



Light Reflectance



Concentration

NEEVA	BOARD	TEGULAR	MICROLOOK
	 Prelude XL <sup>2</sup> /TLX / CR 24 mm Prelude Sixty <sup>2</sup>	 Prelude XL <sup>2</sup> /TLX / CR 24 mm Prelude Sixty <sup>2</sup>	 Prelude XL <sup>2</sup> /TL 15 mm Interlude XL <sup>2</sup> 15 mm Silhouette XL <sup>2</sup> 15 mm
<b>Tiles NEEVA 15 mm</b>			
600 x 600 x 15 mm	2691 M		
600 x 1200 x 15 mm	2692 M		
<b>Tiles NEEVA 18 mm</b>			
600 x 600 x 18 mm	2404 M	2414 M	2423 M
625 x 625 x 18 mm	2404 D		
675 x 675 x 18 mm	2409 M		
600 x 1200 x 18 mm	2405 M	2415 M	2424 M
625 x 1250 x 18 mm	2405 D		
1200 x 1200 x 18 mm	2406 M	2416 M	
<b>Planks NEEVA 18 mm</b>			
300 x 1800 x 18 mm	2408 M		
600 x 1800 x 18 mm	2407 M		
1350 x 600 x 18 mm	2410 M		
1350 x 675 x 18 mm	2411 M		




COLORTONE NEEVA : Black (BK), Cement (CG), Navy (NY), Metal (MT).



EN ISO 354 & EN ISO 11654

$\alpha_w$	NRC	125	250	500	1000	2000	4000	Hz	$\alpha_p$
• NEEVA Board 15 mm									
<b>1.00</b>	0.95	0.40	0.90	1.00	0.90	1.00	1.00		<b><math>\alpha_p</math></b>
• NEEVA Board 18 mm									
<b>1.00</b>	0.95	0.40	0.85	1.00	0.90	1.00	0.95		<b><math>\alpha_p</math></b>
• NEEVA Tegular, MicroLook 18 mm									
<b>0.90</b>	0.85	0.40	0.75	0.85	0.85	0.95	0.95		<b><math>\alpha_p</math></b>

Sound Absorption Class = A

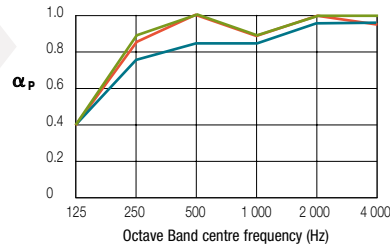

EN 20140-9 & EN 717-1

$D_{ncw}$
<b>27 dB</b> (Tegular, MicroLook 18mm)
<b>24 dB</b> (Board 18mm)



EN ISO 140-3 & EN ISO 717-1

$R_w$
<b>7 dB</b> (15mm)



EN 13501-1

EEA	Euroclass A1 (White)
RUS	G1, V2, D1, T1 to FZ 123

USA	ASTM E84: Flame Spread Index $\leq$ 25; Smoke Developed Index $\leq$ 50 ASTM E1264: Class A (White)
-----	--



EN 12667 & ISO 8301

$\lambda = 0.033$  W/m K



95 % RH

15 YEAR guarantee



Board (15 mm)  $\approx$  1.20 kg/m<sup>2</sup>  
Board (18 mm)  $\approx$  1.26 kg/m<sup>2</sup>  
Tegular & MicroLook (18 mm)  $\approx$  2.52 kg/m<sup>2</sup>

Please contact our Armstrong Technical Sales Group for further details.

[www.armstrong.eu](http://www.armstrong.eu)