

NEWTONE (100% RH)

NEWTONE (100% RH)



Light Reflectance




Confidentiality

NEWTONE

BOARD



Prelude XL² / TLX 24 mm / CR 24 mm / Clean Room Grid 24 mm



600 x 600 x 6 mm


1201 M



EN ISO 354 & EN ISO 11654

α_w	NRC	125	250	500	1000	2000	4000	Hz
0.10(L)	0.10	0.25	0.15	0.10	0.10	0.10	0.05	α_p

Sound Absorption Class = Not classified

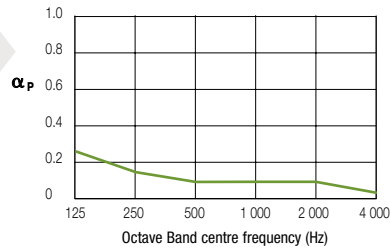

EN 20140-9 & EN 717-1

D_{ncw}	37 dB
------------------------	-------



EN 13501-1

EEA Euroclass A2-s1, d0

RUS NG to FZ 123



100 % RH

15 YEAR guarantee



≈ 6 kg/m²

In all environments where humidity conditions could regularly reach and/or exceed 90% RH we recommend the use of our Trulok Corrosion Resistant grids and associated accessories.



Please contact our Armstrong Technical Sales Group for further details.

www.armstrong.eu



Armstrong®