

# SAHARA MAX

# SAHARA MAX




SAHARA MAX	BOARD	TEGULAR	MICROLOOK
	 Prelude XL <sup>2</sup> /TLX 24 mm Prelude Sixty <sup>2</sup>	 Prelude XL <sup>2</sup> /TLX 24 mm Prelude Sixty <sup>2</sup>	 Prelude XL <sup>2</sup> /TL 15 mm Interlude XL <sup>2</sup> 15 mm
600 x 600 x 18 mm	2103 M	2260 M	2261 M
600 x 1200 x 18 mm	2104 M		



EN ISO 354 & EN ISO 11654

$\alpha_w$	NRC	125	250	500	1000	2000	4000	Hz	$\alpha_p$
0.65	0.65	0.50	0.55	0.75	0.75	0.70	0.45		

Sound Absorption Class = C

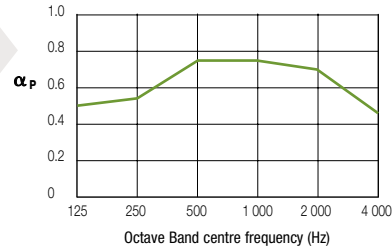

EN 20140-9 & EN 717-1

**D<sub>nfw</sub>**  
35 dB



EN ISO 140-3 & EN ISO 717-1

**R<sub>w</sub>**  
17 dB



EN 13501-1

EEA Euroclass A2-s1, d0

RUS KM1 (G1, V1, D1, T1) FZ 123



EN 12667 & ISO 8301

$\lambda = 0.06$  W/m K



95 % RH



≈ 4.16 kg/m<sup>2</sup>

Please contact our Armstrong Technical Sales Group for further details.

[www.armstrong.eu](http://www.armstrong.eu)